封底　　　　　封面

HAVIT

MS979WB Gaming Mouse Operation Instruction

CREATE FOR GAME

KEYS FUNCTION DISTRIBUTION:

- Left button
- Right button
- Status Indicator
- Scroll Wheel
- Forward button
- DPI Indicator
- Power button & Mode switch button
- Back button
- DPI button
- Light button

DPI value: 800-1600-2400-4800-10000-19000DPI(which can be set)
Default lamplight DPI first level:red, second level:green, three level:blue, four level:cyan, five level:yellow, six level:purple.

5 kinds of RGB light effect:
1.Wave mode ; 2.Go without trace mode; 3.Rainbow mode; 4.YO-YO mode; 5.Off

01　　　　　02

The RGB light mode can be adjusted by "Light button".
Note:
1.In wireless mode and 2.4G mode, the DPI indicator will turn off briefly when you move the mouse, and turn on when you don't move the mouse.
2.The mouse itself does not emit light, this light mode is the light effect of the charging cradle(The driver cannot set the light effect of the charging cradle).

Mode switching operation:
Wired mode: plug in the Type-C data cable can be used.
2.4G mode: unplug the cable, flip the toggle switch forward to 2.4G mode, and plug in the receiver for direct use; or plug the charging cradle into the cable and then plug the receiver into the charging.
(Note: The mouse is factory coded with 2.4G receiver, no need to re-code).
Wireless mode: unplug the cable, toggle the switch backward, the status indicator blue light blinks, enter wireless pairing, open wireless on your computer and search for wireless devices, see the MS979WB.Click on the name of the device, the indicator light will always be on for 3 seconds and then turn off to indicate that the wireless connection is successful. (If you do not search for the device name, please press the left center right button for 3 seconds to enter the pairing state).

Turn off the power: Flip the toggle switch to the center and the mouse power will turn off.

Charging indicator:
Red light blinks during low voltage alarm, green light blinks during charging, green light is always on when full.

For more functions, please enter "http://www.havit.hk/downloads" to download the driver.

03

Main interface and functions description:

www.havitsmart.com

04

05　　　　　06

07

Fire Key

Intervals(5~255)　　Loop(0~255)

Note:The smaller the interval,the faster the fire,if loop is 0,it will continue to fire when the fire key down.

OK

Mouse Parameter
Open Mouse Control panel
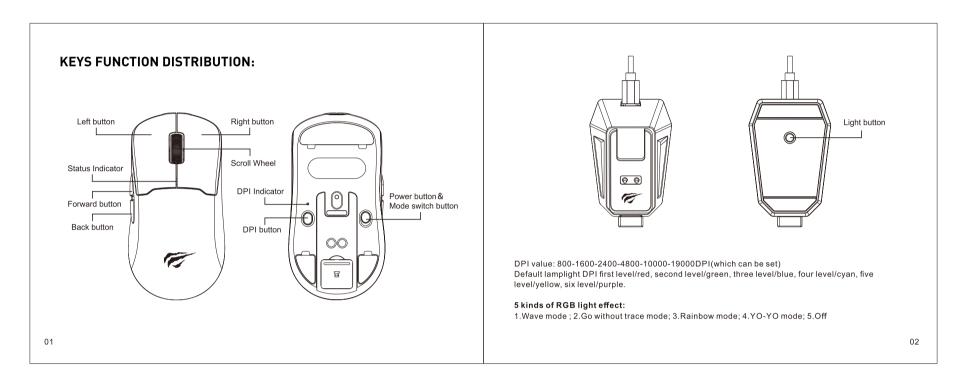
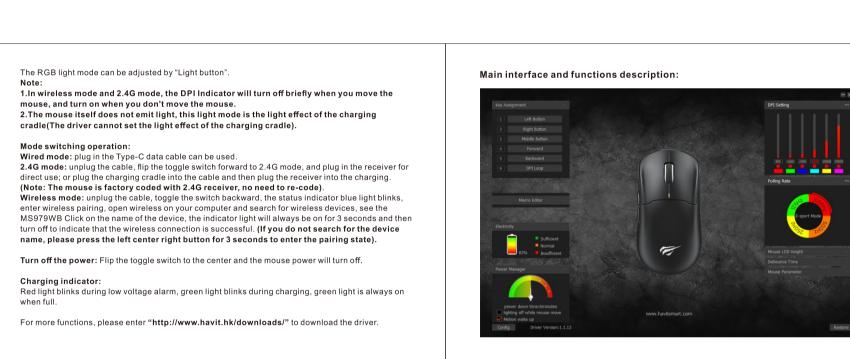**Mouse LOD Height**　　1mm　2mm
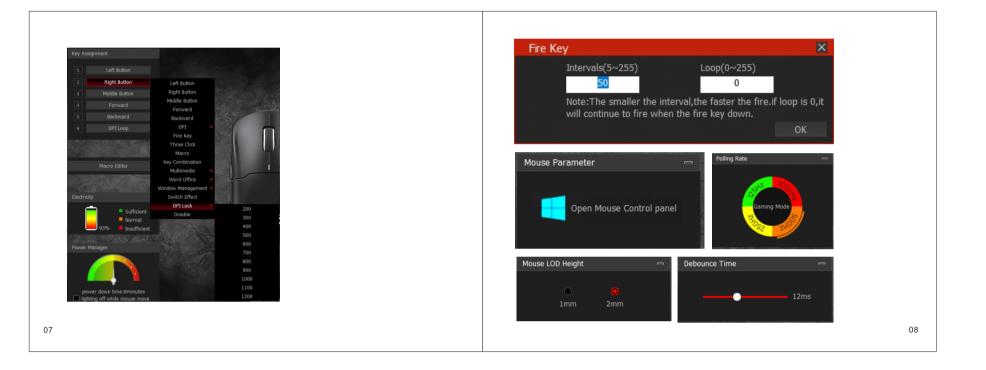
Debounce Time　　12ms

08

---

1. Left button left button function
2. Right button right button function
3. Middle button middle button function
4. Back button: back to previous page
5. Forward button: enter to next page
6. DPI+: switch to higher DPI value,without loop switch
7. DPI-: switch to lower DPI value, without loop switch
8. Three bursts: Equivalent to click the left key for 3 times
9. Fire key: Speed rate can be adjust in software for the mouse key.
10. Combination key: customize Ctrl、Shift、Alt、Win and any of the keyboard buttons to combine button functions(support 3 reassembles farthest,such as Ctrl+A+B)
11. Multimedia function: Media Select, Previous, Next, Stop, Play/Pause, Mute, Volume+, Volume-, Mail, Calculator functions.
12. Word office Copy, Paste, Cut, Select all, New, Save, Print, Open, Undo.
13. Windows My computer, Close window, Display desktop, Run, Minimize, Maximize.
14. DPI: DPI+ and DPI loop
15. Locking DPI:from 200-1200 to lock any of the DPI values.
16. The return rate of mouse : with 125HZ/250HZ/500HZ/1000HZ to choose
17. The movement speed of mouse to adjust the movement speed of mouse
18. The scroll wheel speed of mouse : to adjust the scroll wheel speed of mouse
19. The double-click speed of mouse : to adjust the double-click speed of mouse.
20. Mouse LOD Height: Mouse silent height (the cursor stops responding when the mouse is raised a few millimeters).
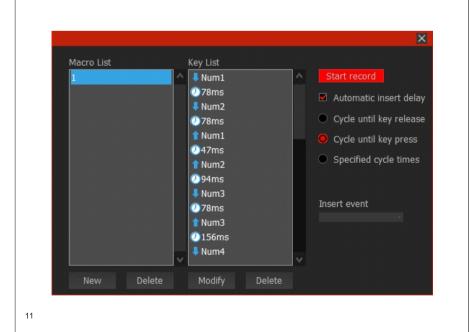21. Debounce Time: Setting the key debounce time.
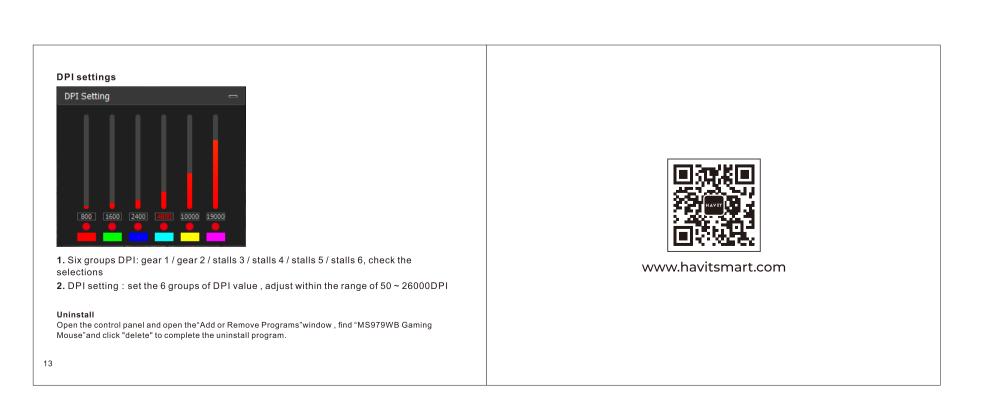
09

Macro definition

Macro management can record any keys of keyboard, the time of keys reaction and the number of keys cycles.

a. Click 【create】 to create a new file, such as a, b, c...
b. Select whether to increase the delay and the times of cycles
c. Click 【start recording】 and start recording any keys of keyboard. The keys you recorded will display in the macro edit box
d. After the recording, click "stop recording"
  a. To revise the recording content, please make the following changes in the macro options:
  Choose to insert the event: insert relevant content in the selected location
  Delete: Delete the selected content
  Modify.Modify the delay value and input button again
f. After recording is completed ,just exit the macro recording interface, no need to click the confirmation keys
g. Execute a macro, such as the mouse button ① key set to "macro functions", after recording is complete, press the mouse①key to play the recorded content

10

11　　　　　12

DPI settings

DPI Setting

1. Six groups DPI: gear 1 / gear 2 / stalls 3 / stalls 4 / stalls 5 / stalls 6, check the selections
2. DPI setting : set the 6 groups of DPI value , adjust within the range of 50 ~ 26000DPI

Uninstall
Open the control panel and open the"Add or Remove Programs"window, find "MS979WB Gaming Mouse"and click "delete" to complete the uninstall program.

13

www.havitsmart.com

产品名称：	MS979WB 说明书
材　　质：	128g双铜
装订方式：	骑马钉
尺　　寸：	120*90(mm)
设 计 人：	设计部——何筱杰
定稿日期：	2024.02.29